



简易撕碎线案例 | SYSTEM EXAMPLES


1.单轴撕碎机WT4080配出料输送带/出料螺旋
Single shaft shredder WT4080 with output conveyor/screw loader

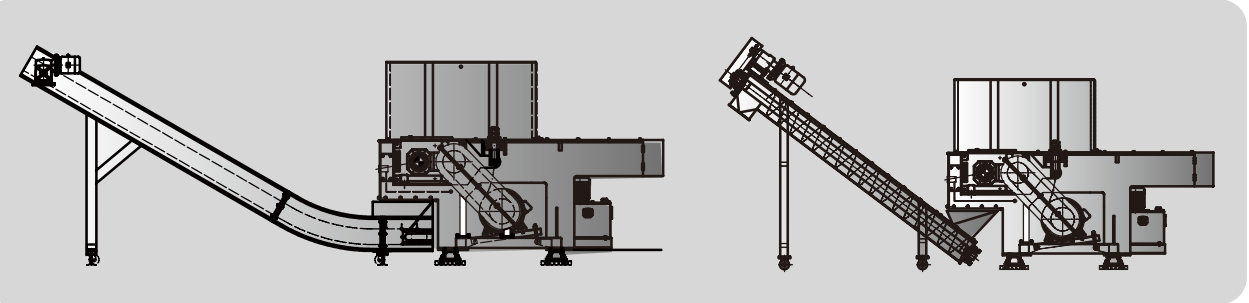

2.单轴撕碎机WT40100配破碎机PC4280
Single shaft shredder WT40100 with Granulator PC4280

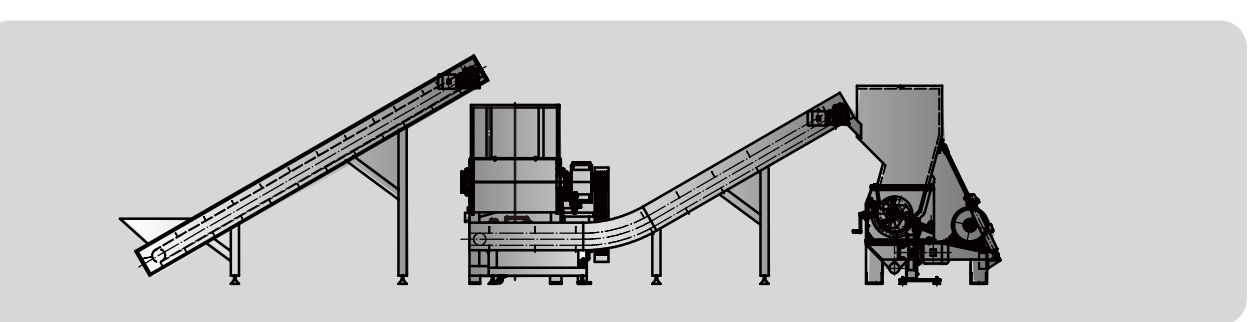

3.卧式管材撕碎机WTHP40150配破碎机PC42100
Horizontal pipe shredder WTHP40150 with Granulator PC42100

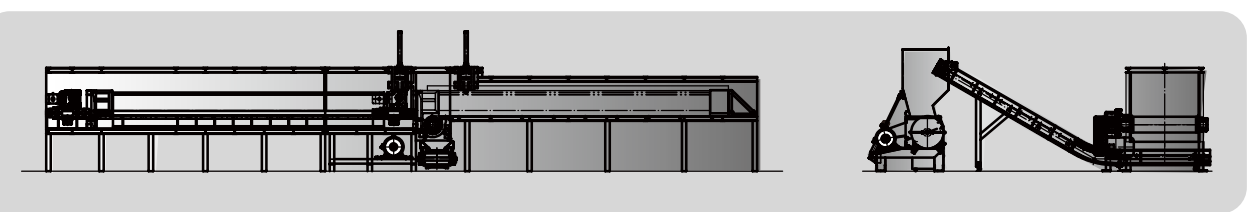

WT2260



WT3080



WT40100



WT40120



WT40150



WT48200



WTB48250



WT66300



单轴撕碎机WT2250配螺旋输送
Single shaft shredder WT2250 with screw loader



管材撕碎机WTP4080破碎线
Pipe shredding system WTP4080



单轴撕碎机WT40100 与破碎机PC4280 生产线
Single shaft shredder WT40100 with Granulator PC4280



单轴撕碎机WT40150 与破碎机PC52120生产线
Single shaft shredder WT40150 with Granulator PC52120



单轴撕碎机WTF40120 配磁选生产线
Single shaft shredder WTF40120 with Magnetic separation



薄膜破碎清洗生产线
Film shredding & washing system




Domestic sales
国内销售热线 TEL: 86-(0)20-39960299

Oversea sales
海外销售热线 TEL: 86-(0)20-84729983

2019年5月第二次印刷

广州市联冠机械有限公司 GUANGZHOU 3E MACHINERY CO., LTD Website: www.3e-machinery.com www.3e-recycling.com
中国·广州市番禺区大龙街新桥村泰安路西横六街4号 NO.4, XI HENG LIU STREET, TAIAN ROAD, XIN QIAO VILLAGE, DALONG, PANYU DISTRICT, GUANGZHOU, CHINA

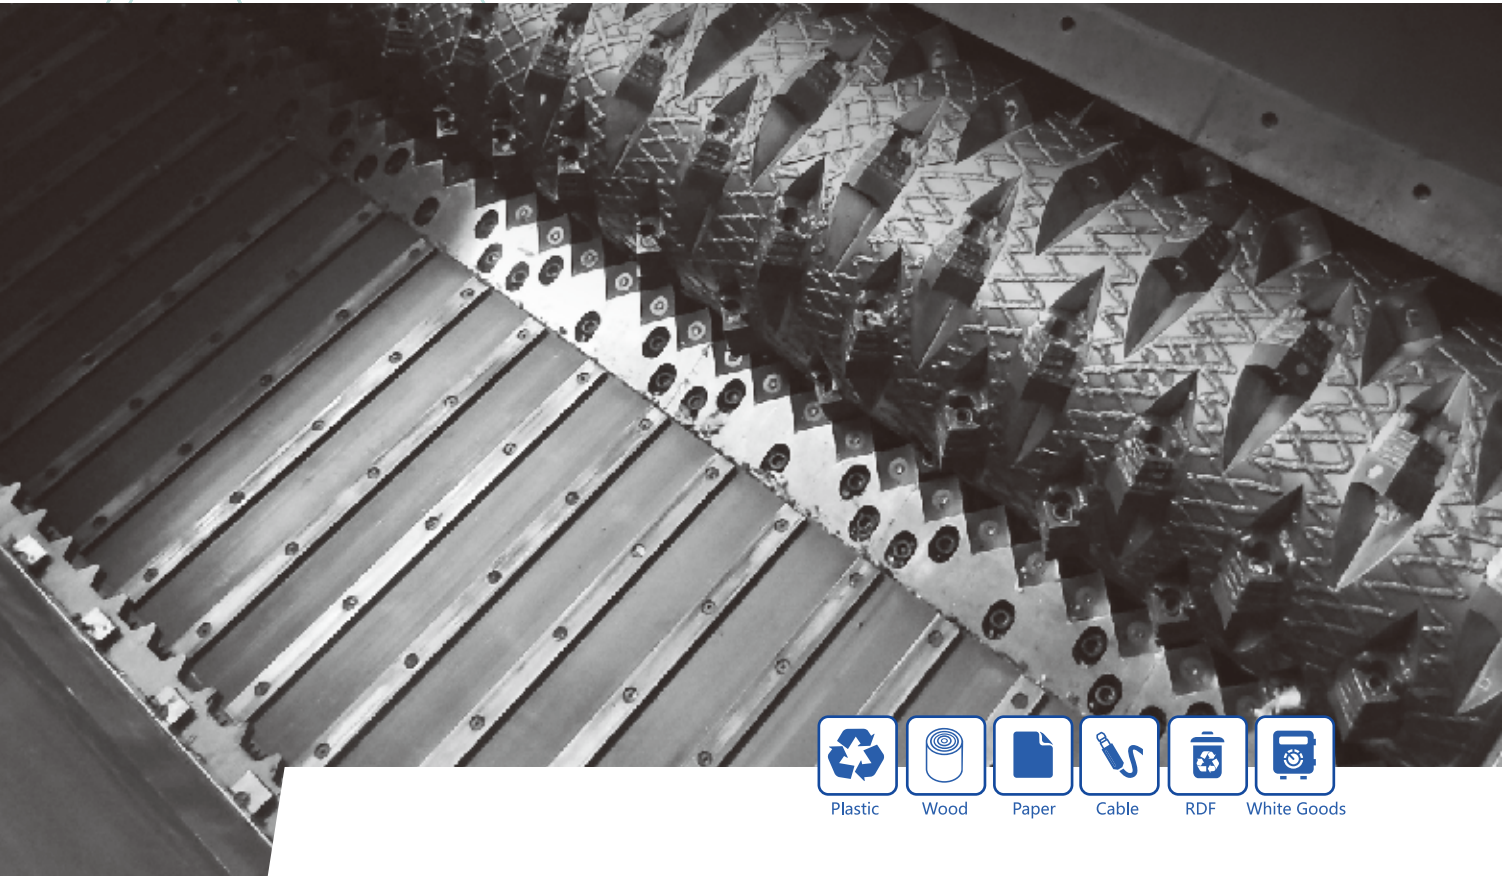

Single shaft shredder
单轴撕碎机



3E机械官网



公司微信

■ 摆臂式单轴撕碎机 SWINGING ARM SINGLE SHAFT SHREDDER

适用于撕碎大型物料如：电视机、洗衣机、冰箱等电器外壳及大型管材、管件、叉车托板、轮胎、包装桶等。
The WTFB range is a swinging arm shredder which uses gravity to guide material onto the shaft.
Suitable for processing a wide range of materials including:

- Refrigerator

-Tires


-Washing machine

-Copper
- Pipe

-Barrels

-Aluminum

-Pallets

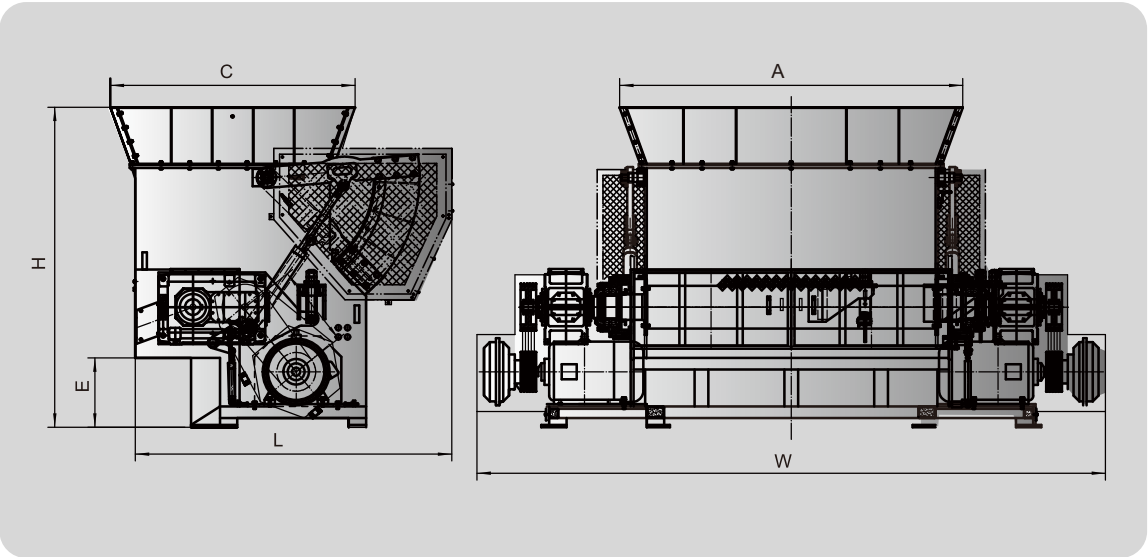


Model	WTB48150	WTB48200	WTB48250
Item			
外形尺寸Dimension L/W/H(mm)	2740× 3750× 2770	2740× 4265× 2770	2740× 4930× 2770
粉碎室尺寸Cutting Chamber C/D(mm)	2120× 1970	2120× 2470	2120× 2970
出料口高度 Height of discharge port E(mm)	600	600	600
油缸行程Cylinder Stroke(mm)	550	550	550
刀体回转直径Rotor Diameter(mm)	φ 464.8	φ 464.8	φ 464.8
主轴转速Main Shaft Speed (r/min)	83	83	83
筛网孔径Screen Mesh(mm)	φ 40	φ 40	φ 40
动刀数量Rotor-knives(PCS)	90+4	114+4	144+4
定刀数量Stator-knives(PCS)	3	4	5
主机功率Main Motor Power(KW)	90	75+75	90+90
液压电机功率Hydraulic Motor Power(KW)	7.5	7.5	7.5
设备重量Weight(KG)	9520	11100	15110

说明:
1.以上为机器的默认配置，筛网可按用户要求在φ20-φ100mm之间定制；
薄膜撕碎机采用Z型筛网，间隙可按用户要求在20-40mm之间定制；
2.动刀数量“+”后面的数量为平动刀数量；
3.以上规格仅供参考，如有更改恕不另行通知。请在订购前与我司销售代表确认。

NOTICE:
1.The above data of screen mesh is the default specification, and the diameter is available between φ20-φ100 at user's request. Film shredder adopts Z style screen which ranges between 20-40mm spaces.
2. “+” after Rotor-knives means the quantity of the flat blade;
3.The above specifications are only for reference and subject to change without prior notice, please confirm with our sales representative when making order.

■ 管材单轴撕碎机 PIPE SINGLE SHAFT SHREDDER

该系列是根据物料外形来设计的，适用于撕碎长条形管材，对管材的处理效率有显著提高，用户可根据管材直径的大小选择相应的机型。
Our pipe shredder series is specifically designed for processing long and thick walled plastic pipe. The shredder can be adjusted to suit various pipe diameters.

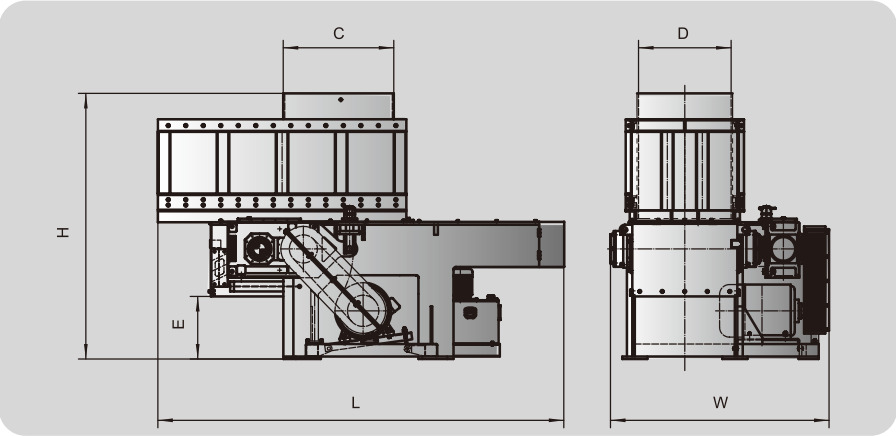

Model	WTP4080	WTP40100	WTP40120	WTP40150
Item				
外形尺寸Dimension L/W/H(mm)	3350× 1670× 2460	3500× 1870× 2460	4100× 2380× 2460	4400× 2580× 2460
粉碎室尺寸Cutting Chamber C/D(mm)	840× 700	920× 880	1080× 1100	1300× 1400
出料口高度 Height of discharge port E(mm)	500	500	500	500
油缸行程Cylinder Stroke(mm)	900	900	1100	1300
刀体回转直径Rotor Diameter(mm)	φ 390.3	φ 390.3	φ 390.3	φ 390.3
主轴转速Main Shaft Speed (r/min)	74	74	74	74
筛网孔径Screen Mesh(mm)	φ 40	φ 40	φ 40	φ 40
动刀数量Rotor-knives(PCS)	42+4	54+4	66+4	90+4
定刀数量Stator-knives(PCS)	2	2	2	3
主机功率Main Motor Power(KW)	37	45	55	75
液压电机功率Hydraulic Motor Power(KW)	2.2	2.2	5.5	5.5
设备重量Weight(KG)	4800	5300	6000	7100

说明:
1.筛网指的是默认的规格，可按用户要求在φ40-φ100之间定制；
2.行程S可按客户要求制作；
3.以上规格仅供参考，如有更改恕不另行通知。请在订购前与我司销售代表确认。


NOTICE:
1.The above data of screen mesh is the default specification,. The screen size ranges betweenφ40-φ100 according to user` s requirement.
2.Cylinder Stroke “S” can be ordered according to user` s requirement
3.The above specifications are only for reference and subject to change without prior notice, please confirm with our sales representative when making order.



■ 卧式管材撕碎机 HORIZONTAL PIPE SHREDDER

本机器主要用于撕碎难度较大的塑料管材，不受管材长度限制。效率高，操作安全简单，推料行程可根据物料长短定做。

The horizontal pipe shredder utilizes a hydraulic ram which feeds plastic pipe horizontally onto a single shaft shredder rotor. It is able to process very long pipes, and can take a very wide diameter pipe or multiple smaller pipes.

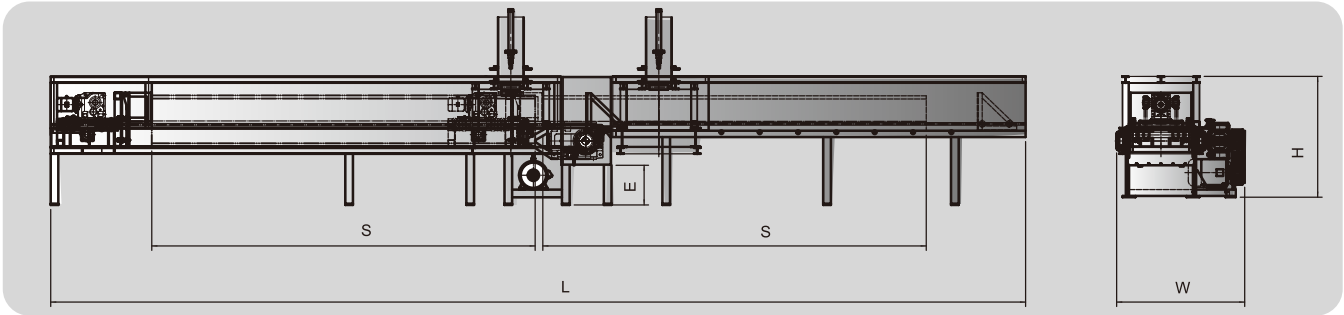

Model	WTPH4080	WTPH40100	WTPH40120	WTPH48150
Item				
外形尺寸Dimension L/W/H(mm)	(3500+S)× 1810× 2600	(3500+S)× 2010× 2900	(3500+S)× 2210× 3300	(3700+S)× 2700× 3400
出料口高度 Height of discharge port E(mm)	500	500	500	700
油缸行程Cylinder Stroke(mm)	400	600	800	1200
刀体回转直径Rotor Diameter(mm)	φ 390.3	φ 390.3	φ 390.3	φ 464.8
主轴转速Main Shaft Speed (r/min)	74	74	74	74
筛网孔径Screen Mesh(mm)	φ 40	φ 40	φ 40	φ 40
动刀数量Rotor-knives(PCS)	42+4	54+4	66+4	90+4
定刀数量Stator-knives(PCS)	2	2	2	3
主机功率Main Motor Power(KW)	37	45	37	90
推料机功率The Cylinder Power(KW)	3	3	3	4
液压电机功率Hydraulic Motor Power(KW)	2.2	2.2	2.2	5.5

说明：
1.筛网指的是默认的规格，可按用户要求在φ40-φ100之间定制；
2.行程S可按客户要求制作；
3.以上规格仅供参考，如有更改恕不另行通知。请在订购前与我司销售代表确认。

NOTICE:
1.The above data of screen mesh is the default specification,. The screen size ranges betweenφ40-φ100 according to user` s requirement.
2.Cylinder Stroke “S” can be ordered according to user` s requirement
3.The above specifications are only for reference and subject to change without prior notice, please confirm with our sales representative when making order.